

# Kanguru Defender 3000

FIPS 140-2 Non-Proprietary Security Policy

**Document Revision: 1.0** 

H.W. Version: 1.0

F.W. Version: 2.10.10

(Kanguru Solutions Copyright 2014 - This document may be reproduced in its entirety without revision)

# **Revision History**

Author(s)	Version	Updates
Nate Cote,	1.0	Initial public release.
Kanguru Solutions		

### Introduction

The Kanguru Defender 3000, herein after referred to as "cryptographic module" or "module", (HW Version: 1.0; FW Version: 2.10.10) is a FIPS 140-2 Level 3 multi-chip standalone cryptographic module that utilizes AES hardware encryption to secure data at rest. The module is a ruggedized, opaque, tamper-evident USB token/storage device that connects to an external general-purpose computer (GPC) outside of its cryptographic boundary to serve as a secure peripheral storage drive for the GPC. The module is a self-contained device that automatically encrypts and decrypts data copied to and from the drive from the externally connected GPC.

All files distributed with the module that are loaded into the GPC (client application and PC configuration data) are excluded from the validation.

The Kanguru Defender 3000 has been specifically designed to address sensitive data concerns of Government and security conscious customers in a variety of markets.

### **Cryptographic Boundary**

The physically contiguous cryptographic boundary is defined by the outer perimeter of the epoxy covered PCBA. The cryptographic module does not contain any removable covers, doors, or openings. The cryptographic module is available in a variety of Approved configurations:

Storage Capacity	Part Number	HW Version	FW Version
4GB	KDF3000-4G		
8GB	KDF3000-8G		
16GB	KDF3000-16G	1.0	2.10.10
32GB	KDF3000-32G	1.0	2.10.10
64GB	KDF3000-64G		
128GB	KDF3000-128G		

<u>Table 1</u> - Kanguru Defender 3000

The following photographs (Figure 1 – Figure 6) define the cryptographic boundary.

### Exhibit 1 – Specification of Cryptographic Boundary



Figure 1 - Kanguru Defender 3000 (Top Side - Outlined in red)



Figure 2 – Kanguru Defender 3000 (Front Side – Outlined in red)



Figure 3 – Kanguru Defender 3000 (Right Side – Outlined in red)

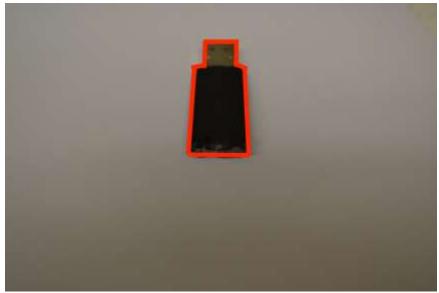


Figure 4 – Kanguru Defender 3000 (Rear Side – Outlined in red)



Figure 5 – Kanguru Defender 3000 (Left Side)



Figure 6 – Kanguru Defender 3000 (Bottom Side – Outlined in red)

**Security Level Specification** 

Security Bever Specification	
Security Requirements Area	Level
Cryptographic Module Specification	3
Cryptographic Module Ports and	
Interfaces	3
Roles, Services, and Authentication	3
Finite State Model	3
Physical Security	3
Operational Environment	N/A
Cryptographic Key Management	3
EMI/EMC	3
Self-tests	3
Design Assurance	3
Mitigation of Other Attacks	N/A

<u>Table 2</u> – *Security Level Table* 

# **Approved Algorithms**

The cryptographic module supports the following Approved algorithms for secure data storage:

- AES with 256-bit key in CBC and ECB mode Encrypt/Decrypt (Cert. #2962)
- SHA-256 (Cert. #2491)
- HMAC-SHA-256 (Cert. #1878)
- RSASSA-PKCS1\_V1\_5 with 2048 bit key and SHA-256 Signature Verification (Cert. #1557)
- SP800-90 DRBG HMAC\_DRBG with HMAC-SHA256 core (Cert. #560)
- PBKDF (vendor affirmed); Key Establishment per Recommendation for Password-Based Key Derivation, Part 1: Storage Applications, Special Publication 800-132, December 2010 (vendor affirmed per FIPS 140-2 IG D.6, Option 2a- The MK is used to recover the DPK through approved decryption AES-256 (Cert. #2962); the PBKDF "salt" is generated by NIST SP800-90 HMAC\_DRBG and its length is 32 bytes; see password strength in "Identification and Authentication Policy" section below; The keys derived in accordance with SP800-32 are used in storage applications only)

### **Allowed Algorithms**

The cryptographic module supports the following Allowed algorithms:

• RSA (key wrapping; key establishment methodology provides 112 bits of encryption strength)

### **Non-Approved Algorithms**

The cryptographic module supports the following non-Approved algorithms:

• Hardware non-deterministic random number generator (for seeding Approved DRBG)

# **Physical Ports and Logical Interfaces**

A single physical universal serial bus port (USB 3.0) is exposed on the top of the module that supports all logical interfaces (data input, data output, control input, status output, power). A light emitting diode (LED) is located inside the bottom metal enclosure for status output. The cryptographic module does not contain a maintenance interface. The following table summarizes the physical ports and logical interfaces:

Physical Port	Logical Interface
	Data Output,
	Data Input,
USB 3.0 port	Control Input,
	Status Output,
	Power
LED	Status Output

<u>Table 3</u> – Specification of Cryptographic Module Physical Ports and Logical Interfaces

### **Security Rules**

The following specifies security rules under which the cryptographic module shall operate in accordance with FIPS 140-2:

- The cryptographic module does not support a non-FIPS mode of operation and only operates
  in an Approved mode of operation. The method used to indicate the Approved mode of
  operation is to query the module for its firmware version number with a software tool
  provided by vendor and then the operator compares this value with the version number listed
  in this security policy.
- The cryptographic module provides logical separation between all of the data input, control input, data output, status output interfaces. The module receives external power inputs through the defined power interface.
- The cryptographic module supports identity based authentication for all services that utilize CSPs and Approved security functions.
- The data output interface is inhibited during self-tests, zeroization, and when error states exist.
- When the cryptographic module is in an error state, it ceases to provide cryptographic services, inhibits all data outputs, and provides status of the error.
- The cryptographic module does not support multiple concurrent operators.
- When the cryptographic module is powered off and subsequently powered on, the results of previous authentications are not be retained and the cryptographic module requires the operator to be re-authenticated in an identity based fashion.

- The cryptographic module protects CSPs from unauthorized disclosure, unauthorized modification, and unauthorized substitution.
- The cryptographic module protects public keys from unauthorized modification, and unauthorized substitution.
- The cryptographic module satisfies the FCC EMI/EMC requirements specified by 47 Code of Federal Regulations, Part 15, Subpart B, Unintentional Radiators, Digital Devices, Class B (i.e., for home use).
- The cryptographic module implements the following self-tests:

#### Power-up self-tests

- o Firmware integrity test (256-bit SHA256 hash verification)
- o SHA-256 KAT
- o HMAC-SHA-256 KAT
- o RSA 2048 Signature Verification KAT
- AES-256 CBC Encrypt KAT
- o AES-256 CBC Decrypt KAT
- SP800-90 DRBG KAT
- Continuous test on non-Approved NDRNG
- Critical functions:
  - RSA 2048 Encrypt KAT

#### Conditional self-test

- o Continuous test on SP800-90 DRBG
- Continuous test on non-Approved NDRNG
- o Firmware load test (via RSA 2048 with SHA-256 Digital Signature Verification)
- o Critical functions: CSP integrity test (via SHA-256-bit CRC Verification)
- Manual key entry is not supported and the cryptographic module does not implement manual key entry tests.
- The cryptographic module does not support bypass capability and does not implement bypass tests.
- The status indicator output by the module when power-on self-tests succeeds is the LED flashing at 3 Hz, and outputs an icon to host PC.
- The status indicator output by the module when a power-on self-test fails is flashing on the status output LED in a continuous fashion at 16Hz.
- The status indicator output by the module when a conditional self-test fails is flashing on the status output LED in a continuous fashion at 16Hz.

- The status indicator output by the module upon entry into the error state is flashing on the status output LED in a continuous fashion at 16Hz.
- Split-knowledge processes are not supported.
- All maintenance related services (i.e. maintenance role, physical maintenance interface, logical maintenance interface) are not applicable.
- Plaintext CSP output is not supported.
- The module does not support plaintext password entry. Passwords are entered encrypted with AES.
- The cryptographic module does not contain dedicated physical ports for CSP input/output.
- The power interfaces cannot be used to drive power to external targets.
- The continuous comparison self-tests related to twin implementations are not applicable.
- Upon authenticating into a particular role, it is not possible to switch into another role without re-authenticating.
- The cryptographic module does not provide the means to feedback authentication data.
- The finite state machine does not support the following states: maintenance, CSP output.
- The requirements of FIPS 140-2 Section 4.6 are not applicable; there exists no support for the execution of untrusted code. All code loaded from outside the cryptographic boundary is cryptographically authenticated via RSA Digital Signature Verification via the Firmware load test.
- The cryptographic module is not a radio and does not support any wireless interfaces or OTAR.
- The requirements of FIPS 140-2 Section 4.11 are not applicable; the cryptographic module was not designed to mitigate specific attacks beyond the scope of FIPS 140-2.

### **Identification and Authentication Policy**

The following table defines the roles, type of authentication, and associated authenticated data types supported by the cryptographic module:

Role	Type of Authentication	<b>Authentication Data</b>
Master/ Cryptographic	Identity-based	Password (8 to 136 bytes)
Officer: Responsible for		
initialization, physical security		
inspection, and administrative		
functions.		
<b>User:</b> The end user of the	Identity-based	Password (8 to 136 bytes)
product that utilizes the		
module under the direction of		
the Master.		
CD Update Officer: The end	Identity-based	RSA Signature Verification

user of the product that utilizes	(RSA 2048 bit)
the module to update the CD	
partition of the module.	

<u>Table 4</u> - Roles and Required Identification and Authentication (FIPS 140-2 Table C1)

The following table defines the strength of the implemented identity-based authentication mechanism (password verification or RSA signature verifications) by discussing the probabilities associated with random attempts and multiple consecutive attempts within a one-minute period towards subverting the implemented authentication mechanisms:

Authentication Mechanism	Strength of Mechanism: Random attempted breach	Strength of Mechanism: Multiple consecutive attempts in a one-minute period
Password verification	Less than 1 / 52,307,591,375,000	Less than 60/ 52,307,591,375,000
RSA signature verification	Less than 1 / 2^112	Less than 60/ 2 ^112

<u>Table 5</u> - Strengths of Authentication Mechanisms (FIPS 140-2 Table C2)

The upper bound for the probability of correctly guessing the password at random is: 1/(10\*26\*26\*95\*95\*95\*95\*95), which equates to 1/52,307,591,375,000. This is less than 1/1,000,000.

The minimum length of a password is 8 characters, which can be seen in the format of 1/(C0\*C1\*C2\*C3\*C4\*C5\*C6\*C7). The password characters include 95 possible samples, which come from a combination of "0-9", "A-Z", "a-z", and symbols (e.g. ! # { \$ ). Furthermore, the module requires that passwords meet a specific composition:

- -One character of number 0 9 (10 possible samples)
- -One character of the upper case of letter A Z (26 possible samples)
- -One character of the lower case of letter a z (26 possible samples)

The module allows 60 attempts in a one-minute period, which equates to the following: 60 / 10\*26\*26\*95\*95\*95\*95\*95 which is less than 1 / 100,000.

# **Access Control Policy**

Table 6 provides a mapping of CSPs/Public Keys to their respective services.

The list of roles, services, cryptographic keys & CSPs, and types of access to the cryptographic keys & CSPs that are available to each of the authorized roles via the corresponding services are demonstrated in Table 7.

CSP/Public Key	Type	Service(s)
Data Encryption/Decryption Key of Private Partition	XTS-AES-256	Set User Disk Password of Partition, Set User Disk Password of Private Partition, Set Master Disk Password of Partition, Set Master Disk Password of Private Partition, Master Login Into Partition, User Login Into Partition, Master Login Into Private Partition, Create User of Private Partition, Write Mass-Storage Data to Partition, Write Mass-Storage Data to Private Partition,
		Read Mass-Storage Data to Private Partition
Data Encryption/Decryption Key of CD Area	XTS-AES-256	Read Mass-Storage Data from CD Partition
User Disk Password	8-byte to 136- byte password	Set User Disk Password of Partition, Set User Disk Password of Private Partition, User Login Into Partition, Change Disk Password of Partition, Change Disk Password of Private Partition, Create User of Partition, Create User of Private Partition
Master Disk Password	8-byte to 136- byte password	Set Master Disk Password of Partition, Set Master Disk Password of Private Partition, Master Login Into Partition, Master Login Into Private Partition, Change Disk Password of Partition, Change Disk Password of Private

		Doutition
		Partition,
		Create User of Partition,
II. II. II. II.	A E.G. 256	Create User of Private Partition
Key Encryption/Decryption Key	AES-256	Set User Disk Password of Partition,
of Private Partition		Set User Disk Password of Private
		Partition,
		Set Master Disk Password of Partition,
		Set Master Disk Password of Private
		Partition,
		Master Login Into Partition,
		User Login Into Partition,
		Master Login Into Private Partition,
		Create User of Private Partition
DRBG	SP800-90A	Set User Disk Password of Partition,
Internal State (V and Key)		Set User Disk Password of Private
		Partition,
		Set Master Disk Password of Partition,
		Set Master Disk Password of Private
		Partition,
		Master Login Into Partition,
		User Login Into Partition,
		Master Login Into Private Partition,
		Create User of Private Partition
AES Session Key of Secure	AES-256	Set User Disk Password of Partition,
Channel		Set User Disk Password of Private
		Partition,
		Set Master Disk Password of Partition,
		Set Master Disk Password of Private
		Partition,
		Master Login Into Partition,
		User Login Into Partition,
		Master Login Into Private Partition,
		Logout From Partition,
		Logout From Private Partition,
		Change Disk Password of Partition,
		Change Disk Password of Private
		Partition,
		Create User of Partition,
		Create User of Private Partition,
		Write Mass-Storage Data to Partition,
		Read Mass-Storage Data to Partition,
		_
		Write Mass-Storage Data to Private
		Partition,  Pand Mass Storage Date to Private
		Read Mass-Storage Data to Private
		Partition

MAC Key of Secure Channel	HMAC-SHA-	Set User Disk Password of Partition,	
	256	Set User Disk Password of Private	
		Partition,	
		Set Master Disk Password of Partition,	
		Set Master Disk Password of Private	
		Partition,	
		Master Login Into Partition,	
		User Login Into Partition,	
		Master Login Into Private Partition,	
		Logout From Partition,	
		Logout From Private Partition,	
		Change Disk Password of Partition,	
		Change Disk Password of Private	
		Partition,	
		Create User of Partition,	
		Create User of Private Partition,	
		Write Mass-Storage Data to Partition,	
		Read Mass-Storage Data to Partition,	
		Write Mass-Storage Data to Private	
		Partition,	
		Read Mass-Storage Data to Private	
		Partition	
CD Update Public Key	RSA-2048	CD Update,	
CD Opuate Fublic Key	SHA-256	Set CD Update Public Key	
Firmwore Undete Dublic Very	RSA-2048	Start Firmware Update	
Firmware Update Public Key	SHA-256	Start Firmware Opdate	
Sagura Saggion Dublic Voy	RSA-2048	Master Login Into Position	
Secure Session Public Key	OAEP	Master Login Into Partition,	
	UAEP	User Login Into Partition,	
		Master Login Into Private Partition	

<u>Table 6</u> – CSP/Public Keys and Associated Usage

<u>Table 7</u> – Services Authorized for Roles, Access Rights within Services (FIPS 140-2 Table C3, Table C4) \* No role means that the associated services in the Exhibit 7 below are non-security relevant, unauthenticated, and can be accessed by any operator.

Role	:			Service	Type(s) of Access to CSPs:
*No role	Crypto- graphic Officer/ Master	User	CD Update Officer	Self Tests: Performs the full suite of	Cryptographic Keys & CSPs  R=Read the item into memory  W=Write the item into memory  N/A
Λ				required power-up self-tests.	N/A
X				<b>Get Device Info:</b> This function gets status information from the module.	N/A
X				Set Write Protect: This function enables or disables the module with write-protection.	N/A
	X			Set User Disk Password of Partition: This function sets the User Disk Password for Partition to the module to restrict access to the encrypted partition of the module.	W: User Disk Password  W: Data Encryption/ Decryption Key of Private Partition  W/R: Key Encryption/ Decryption Key of Private Partition  W: DRBG Internal State (V and Key)  R: MAC Key of Secure Channel  R: AES Session Key of Secure Channel
	X			Set User Disk Password of Private Partition: This function sets the User Disk Password for Private Partition to the module to restrict access to the encrypted (private) partition of the module.	W: User Disk Password  W: Data Encryption/ Decryption Key of Private Partition  W/R: Key Encryption/ Decryption Key of Private Partition  W: DRBG Internal State (V and Key)

		R: MAC Key of Secure Channel R: AES Session Key of Secure Channel
X	Set Master Disk Password of Partition: This function sets the Master Disk Password for Partition to the module to restrict access to the encrypted partition of the module.	W: Master Disk Password W: Data Encryption/ Decryption Key of Private Partition W/R: Key Encryption/ Decryption Key of Private Partition W: DRBG Internal State (V and Key) R: MAC Key of Secure Channel
X	Set Master Disk Password of Private Partition: This function sets the Master Disk Password for Private Partition to the module to restrict access to the encrypted (private) partition of the module.	R: AES Session Key of Secure Channel W: Master Disk Password W: Data Encryption/ Decryption Key of Private Partition W/R: Key Encryption/ Decryption Key of Private Partition W: DRBG Internal State (V and Key) R: MAC Key of Secure Channel R: AES Session Key of
X	Master Login Into Partition: This function opens (enables access to) the encrypted partition of module with Master Disk Password.	R: Master Disk Password  W: Data Encryption/ Decryption Key of Private Partition  R: Key Encryption/ Decryption Key of Private Partition

	-		1
			W: DRBG Internal State (V and Key)
			R: MAC Key of Secure Channel
			R: AES Session Key of Secure Channel
			W/R: Secure Session Public Key
	X	User Login Into Partition: This	R: User Disk Password
		function opens (enables access to) the encrypted partition of module with User Disk Password.	R: Data Encryption/ Decryption Key of Private Partition
			R: Key Encryption/ Decryption Key of Private Partition
			W: DRBG Internal State (V and Key)
			R: MAC Key of Secure Channel
			R: AES Session Key of Secure Channel
			W/R: Secure Session Public Key
X		Master Login Into Private Partition:	R: Master Disk Password
		This function opens (enables access to) the encrypted (private) partition of module with Master Disk Password.	R: Data Encryption/ Decryption Key of Private Partition
			W: Key Encryption/ Decryption Key of Private Partition
			W: DRBG Internal State (V and Key)
			R: MAC Key of Secure Channel
			R: AES Session Key of Secure Channel
			W/R: Secure Session Public Key
X	X	Logout From Partition: This	R: MAC Key of Secure
		function closes (disables access to) the	Channel

		an arrested moutition of module	<u> </u>
		encrypted partition of module.	R: AES Session Key of Secure Channel
X	X	Logout From Private Partition: This function closes (disables access to) the encrypted (private) partition of	R: MAC Key of Secure Channel
		module.	R: AES Session Key of Secure Channel
X	X	Change Disk Password of Partition: This function changes the Master Disk Password (or) User Disk Password of	R: MAC Key of Secure Channel
		partition from old password to new password.	R: AES Session Key of Secure Channel
			R/W: Master Disk Password (or) User Disk Password
X	X	Change Disk Password of Private Partition: This function changes the Master Disk Password (or) User Disk	R: MAC Key of Secure Channel
		Password of Private partition from old password to new password.	R: AES Session Key of Secure Channel
			R/W: Master Disk Password (or) User Disk Password
X		Create User of Partition: This function creates the User and	R: Master Disk Password,
		associated passwords for accessing the partition.	R: AES Session Key of Secure Channel,
			R: MAC Key of Secure Channel,
			W: User Disk Password
X		Create User of Private Partition:	R: Master Disk Password,
		This function creates the User and associated passwords for accessing the Private partition.	R: MAC Key of Secure Channel
			R: AES Session Key of Secure Channel
			W: User Disk Password
			W: Data Encryption/ Decryption Key of Private Partition
			W: Key Encryption/ Decryption Key of Private Partition
			W: DRBG Internal State (V and Key)

				1	T=
	X	X		Write Mass-Storage Data to Partition This function writes data to the (encrypted) partition.	R: MAC Key of Secure Channel
				the (enerypeed) partition.	R: AES Session Key of Secure Channel
					R: Data Encryption/
					Decryption Key of Private Partition
	X	X		<b>Read Mass-Storage Data to Partition:</b> This function reads data from the (encrypted) partition.	R: MAC Key of Secure Channel
				() paramon	R: AES Session Key of Secure Channel
					R: Data Encryption/ Decryption Key of Private Partition
	X	X		Write Mass-Storage Data to Private	R: MAC Key of Secure
				<b>Partition:</b> This function writes data to the private (encrypted) partition.	Channel
				2 31, F	R: AES Session Key of Secure Channel
					R: Data Encryption/ Decryption Key of Private Partition
	X	X		Read Mass-Storage Data to Private	R: MAC Key of Secure
				<b>Partition:</b> This function reads data from the private (encrypted) partition.	Channel
					R: AES Session Key of Secure Channel
					R: Data Encryption/ Decryption Key of Private Partition
X			_	Read Mass-Storage Data from CD Partition: This function reads data	R: Data Encryption/
				from the public CD partition.	Decryption Key of CD Area
X				<b>Show Status</b> : This function gets the status from specified partition.	N/A
			X	CD Update: This function enables writing of data to the CD partition.	R: CD Update Public Key
			X	Set CD Update Public Key: This function updates the 2048-bit RSA	R, W: CD Update Public
				function updates the 2048-bit RSA public key used to verify the signature of the data written to CD partition	Key
	X			of the data written to CD partition.  Start Firmware Update: This	R,W: Firmware Update
				function enables the secure firmware	Public Key
				update via RSA 2048 with SHA-256	

		digital signature verification (limited operational environment firmware load test).	
X		<b>Zeroize</b> : This function zeroizes all the CSPs, and puts module into uninitialized state.	W: All CSPs

<u>Table 7</u> – Services Authorized for Roles, Access Rights within Services (FIPS 140-2 Table C3, Table C4) Cont'd

### **Physical Security Policy**

The following physical security mechanisms are implemented by the cryptographic module:

- Production grade components.
- Opaque tamper evident metal and plastic enclosure without any gaps or openings.
- Strong adhesive materials that prevent dismantling the module without high probability of causing severe damage and visible tamper evidence.
- Chips and pin connectors are coated with epoxy.

NOTICE: The FIPS 140-2 Area 5 physical security testing was performed at ambient temperature; Kanguru Solutions does not claim any FIPS 140-2 Area 5 physical security protection beyond the ambient temperature.

The following table summarizes the actions required by the Master/Cryptographic Officer Role to ensure that physical security is maintained.

Physical Security Mechanisms	Recommended frequency of inspection and testing	Inspection/Test Guidance Details
Production	N/A	N/A
grade		
components		
Opaque non	Upon each usage	Inspect the entire perimeter for
removable metal		scratches, scrapes, gouges, cuts and any
enclosure with		other signs of tampering. Remove the
strong adhesive		unit from service when any such
materials		markings are found.

<u>Table 8</u> - Inspection/Testing of Physical Security Mechanisms (FIPS 140-2 Table C5)

# **Mitigation of Other Attacks Policy**

The cryptographic module has not been including the security mechanisms implemented to mitigate the attacks.

Other	Mitigation	Specific
Attacks	Mechanism	Limitations
N/A	N/A	N/A

Table 9 - Mitigation of Other Attacks (FIPS 140-2 Table C6)

### References

- FIPS PUB 140-2
- FIPS PUB 140-2 DTR
- FIPS PUB 140-2 Implementation Guidance
- FIPS 197 AES
- FIPS 180-4 SHS
- RSA PKCS#1 V2.1
- SP800-90

Appendix 1 – Part Number Matrix (Kanguru Defender 3000: Hardware Version 1.0; Firmware version: 2.10.10)

Storage Capacity	Part Number
4GB	KDF3000-4G
8GB	KDF3000-8G
16GB	KDF3000-16G
32GB	KDF3000-32G
64GB	KDF3000-64G
128GB	KDF3000-128G

<u>Table 10</u> – *Module Part Numbers*